


DELUXE FLAG ARRANGEMENTS



Arrangement for flag size
6' x 10' or smaller




Shock spring and Safety
Cable supplied with
arrangements for 8' x 12'
or larger flag sizes

Constructed of 1/8" stainless steel aircraft cable with a stainless steel thimble attached at each end with 2 copper crimps. These flag arrangements provide the method of attaching the flag or flags to the cable assembly. This is also an excellent method for changing the quantity of flags or the size(s) of flag(s) without having to change the entire cable assembly. Deluxe flag arrangements are supplied with either 2 or 3 stainless steel quick links depending on the recommended flag size, flag snaps, shock spring where needed and safety cable where needed.

MODEL	ITEM #	FOR FLAG SIZE	SUPPLIED WITH				1-5	6+	LBS.
			QUICK LINKS	FLAG SNAPS	SHOCK SPRING	SAFETY CABLE			
FA2	360474	2' x 3'	2	2 (STAINLESS STEEL SSFS-1)	—	—	\$63	\$58	1.2
FA25	360475	2-1/2' x 4'	2	2 (STAINLESS STEEL SSFS-1)	—	—	71	61	1.3
FA3	360476	3' x 5'	2	2 (STAINLESS STEEL SSFS-1)	—	—	72	63	1.3
FA4	360477	4' x 6'	2	2 (STAINLESS STEEL SSFS-1)	—	—	75	68	1.3
FA5	360478	5' x 8' or 5' x 9-1/2'	2	2 (STAINLESS STEEL SSFS-1)	—	—	79	72	1.4
FA6	360479	6' x 10'	2	2 (STAINLESS STEEL SSFS-1)	—	—	86	79	1.4
FA8	360480	8' x 12'	3	2 (STAINLESS STEEL SSFS-2)	1	1	123	111	2.3
FA10	360481	10' x 15' or 10' x 19'	3	2 (STAINLESS STEEL SSFS-2)	1	1	125	114	2.6
FA12	360482	12' x 18'	3	2 (STAINLESS STEEL SSFS-2)	1	1	133	121	2.6
FA15	360483	15' x 25'	3	2 (STAINLESS STEEL SSFS-2)	1	1	138	125	2.7
FA20	360484	20' x 30' or 20' x 38'	3	2 (STAINLESS STEEL SSFS-2)	1	1	145	130	2.9
FA25	360485	25' x 40'	3	2 (STAINLESS STEEL SSFS-2)	1	1	149	133	3.6
FA30	360486	30' x 50' or 30' x 60'	3	2 (STAINLESS STEEL SSFS-2)	1	1	153	135	4.4

CABLE ASSEMBLIES

Constructed of 1/8" and/or 3/16" stainless steel aircraft cable incorporating a stainless steel swivel to minimize the effect of unraveling due to the rotation of the truck assembly. The upper cable section is supplied with a stainless steel thimble, 2 copper crimps, and two ball cable stops, however, because this section must be threaded through the truck assembly, these parts are not attached to the cable before shipment and must be attached in the field. These standard cable assemblies are designed for flagpoles with a winch installed at 4' above grade.

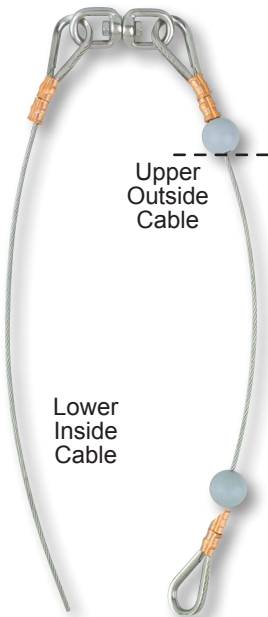

ITEM #	EXPOSED HT. OF FLAGPOLE	LOWER INSIDE CABLE		UPPER OUTSIDE CABLE		1-5	6+	LBS.
		DIA.	LEN.	DIA.	LEN.			
360056	20'	3/32"	17'	1/8"	17'	\$99	\$90	1.4
360332	25**	3/32"	21'	1/8"	21'	111	97	1.6
360057	25'	1/8"	21'	1/8"	21'	111	97	1.9
360333	30**	3/32"	27'	1/8"	27'	117	105	1.9
360058	30'	1/8"	27'	1/8"	27'	117	105	2.2
360334	35**	3/32"	31-1/2'	1/8"	31-1/2'	125	114	2.1
360059	35'	1/8"	31-1/2'	1/8"	31-1/2'	125	114	2.5
360060	40'	1/8"	37'	3/16"	37'	136	124	4.2
360061	45'	1/8"	42'	3/16"	42-1/2'	142	129	4.6
360062	50'	1/8"	46'	3/16"	46-1/2'	156	139	5.1
360063	60'	1/8"	56-1/2'	3/16"	57'	193	176	6.1
360064	70'	1/8"	66-1/2'	3/16"	67'	207	184	7.0
360065	78'	1/8"	74-1/2'	3/16"	75'	213	193	7.8
360066	80'	1/8"	76-1/2'	3/16"	77'	220	201	8.0
360067	90'	1/8"	86-1/2'	3/16"	87'	279	251	8.9
360068	100'	1/8"	96-1/2'	3/16"	97'	297	272	9.9
360069	110'	1/8"	106-1/2'	3/16"	107'	310	279	11
360070	120'	1/8"	116-1/2'	3/16"	117'	315	284	12
360071	130'	1/8"	126-1/2'	3/16"	127'	362	328	13
360072	140'	1/8"	136-1/2'	3/16"	137'	375	335	14
360073	150'	1/8"	146-1/2'	3/16"	147'	400	362	15
360074	160'	1/8"	156-1/2'	3/16"	157'	426	387	16
360075	170'	1/8"	166-1/2'	3/16"	167'	452	408	17
360076	180'	1/8"	176-1/2'	3/16"	177'	504	452	18
360077	190'	1/8"	186-1/2'	3/16"	187'	541	488	19
360078	200'	1/8"	196-1/2'	3/16"	197'	595	534	20

*To be used with 5" diameter poles with our M-5 Winch installed. Cable Assemblies can be mixed to achieve higher quantity pricing.